

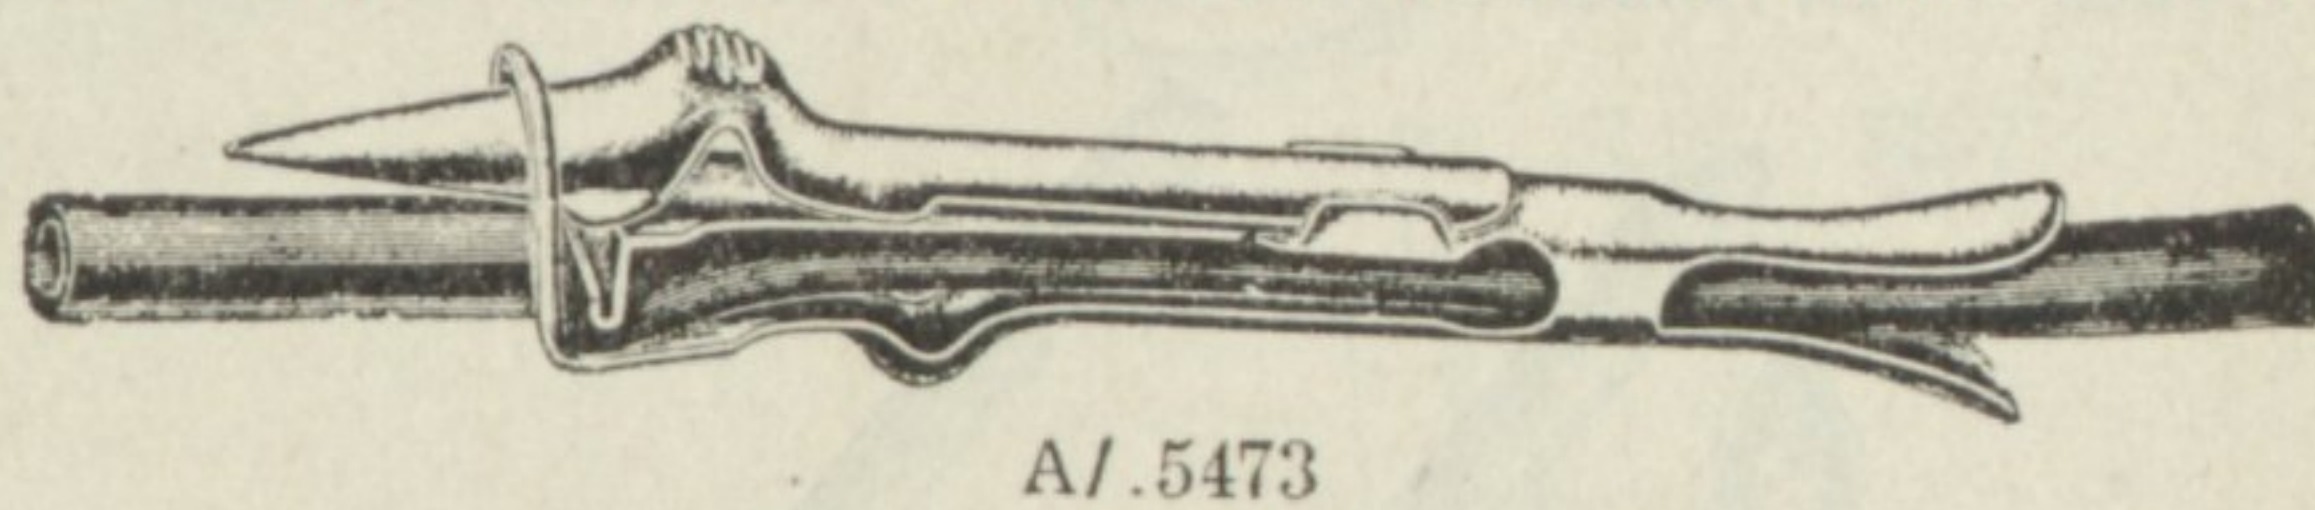
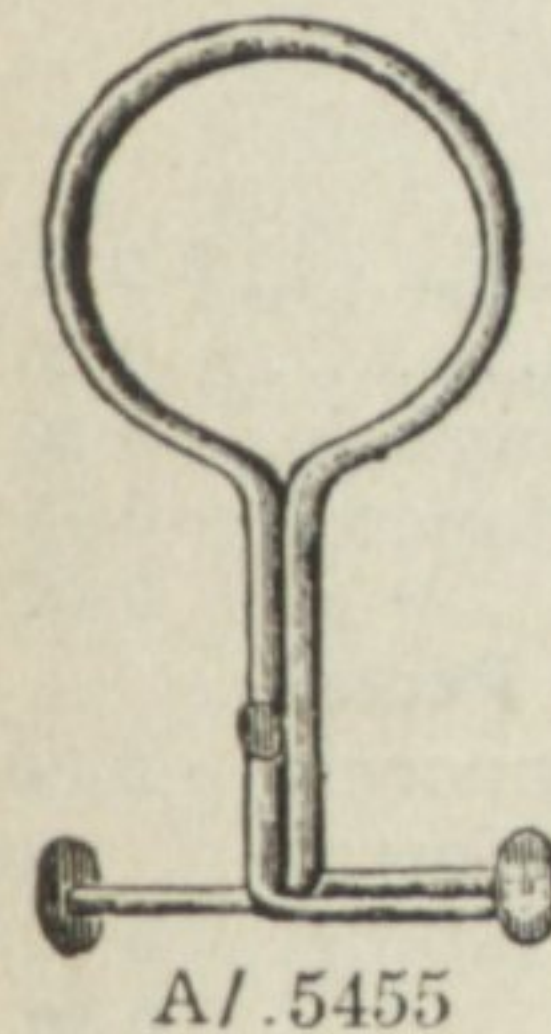
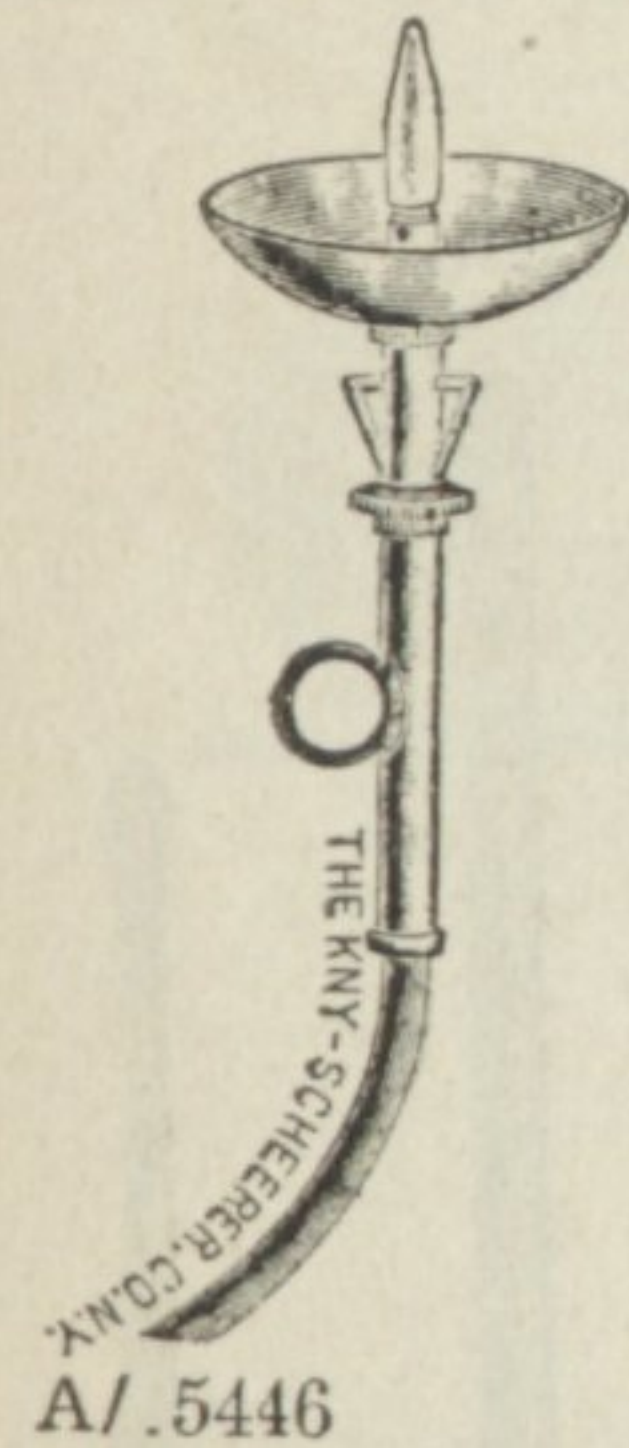
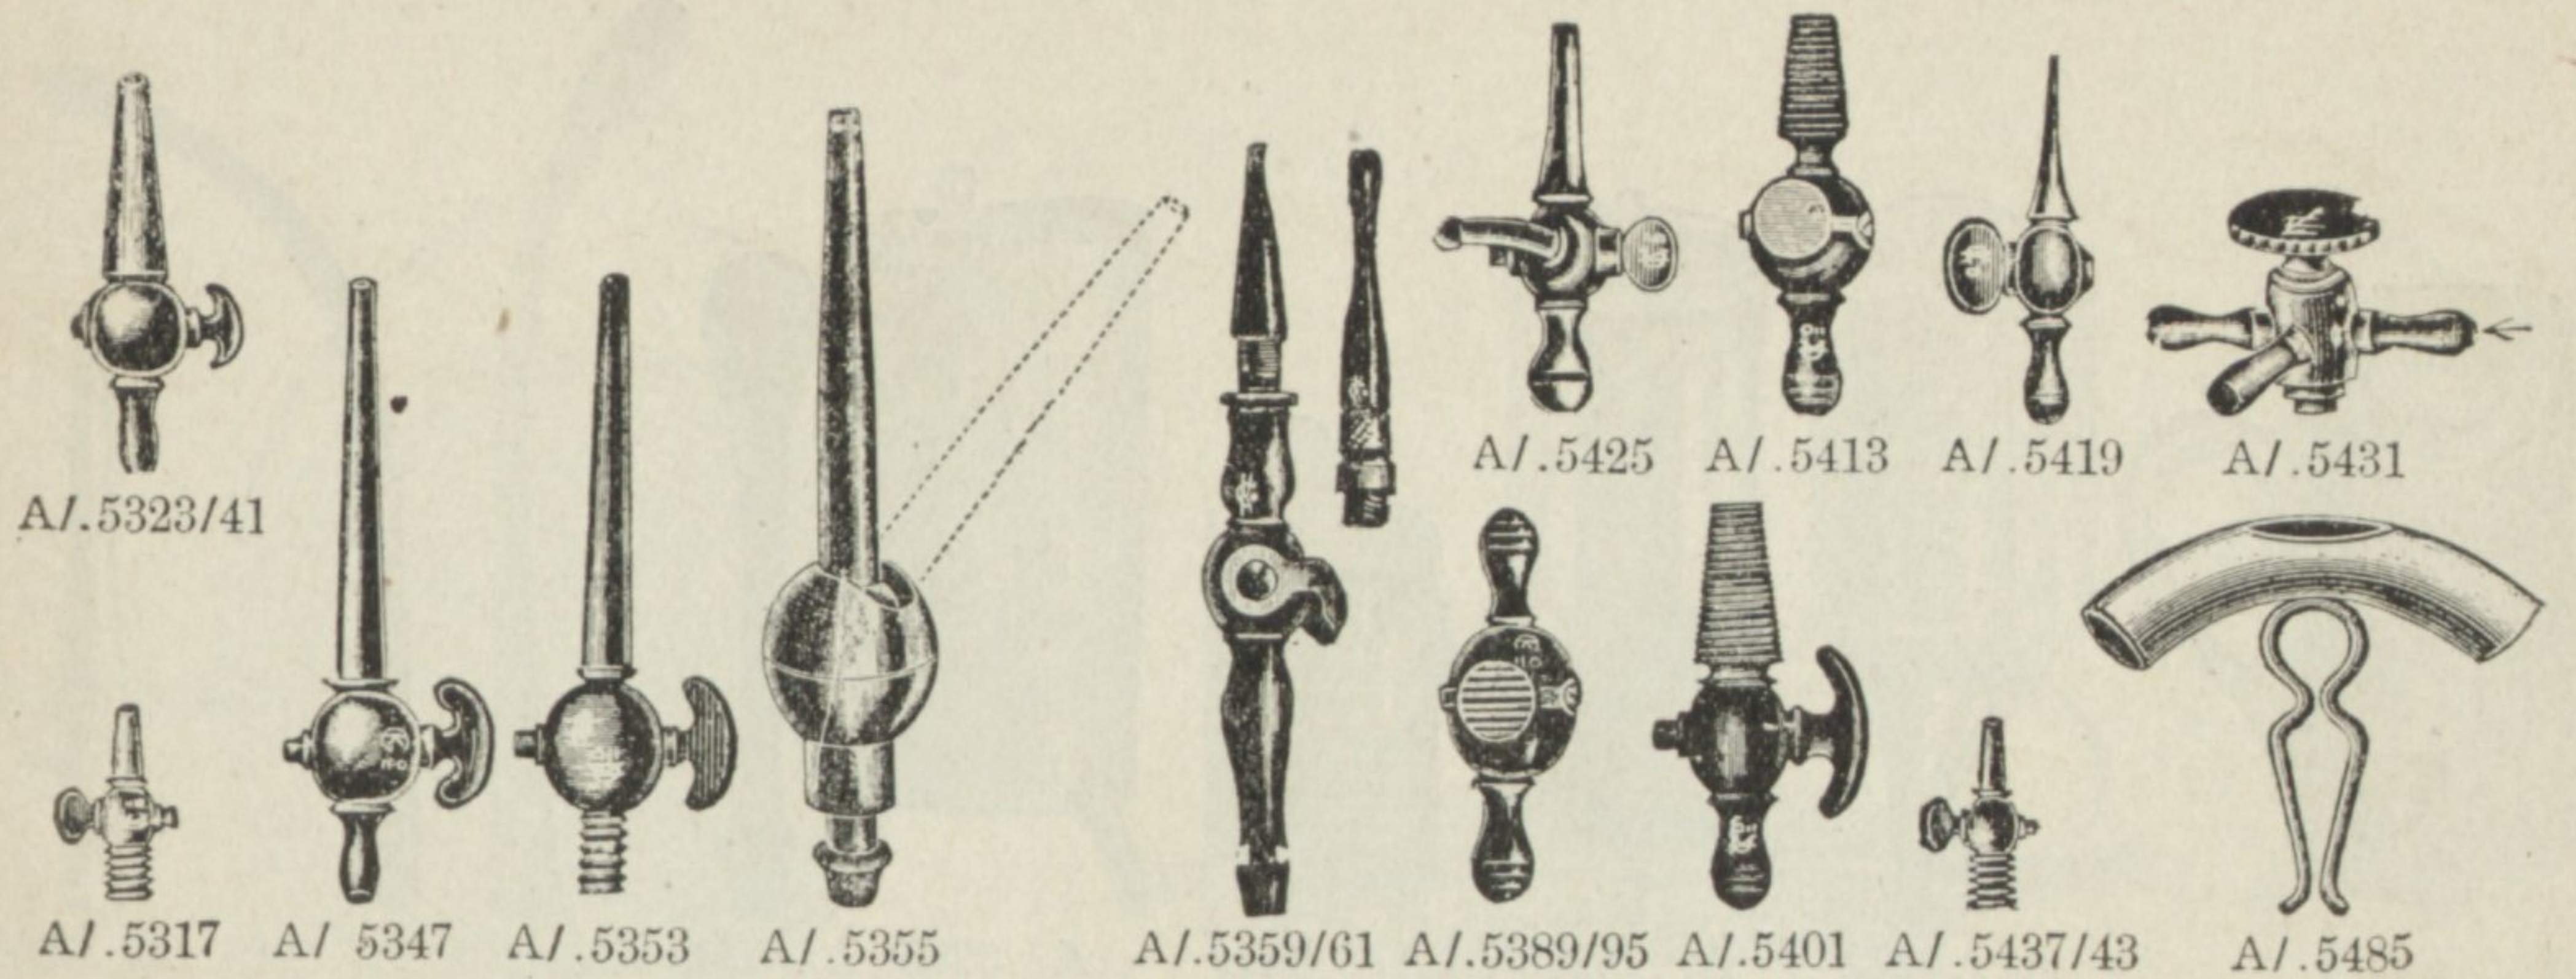
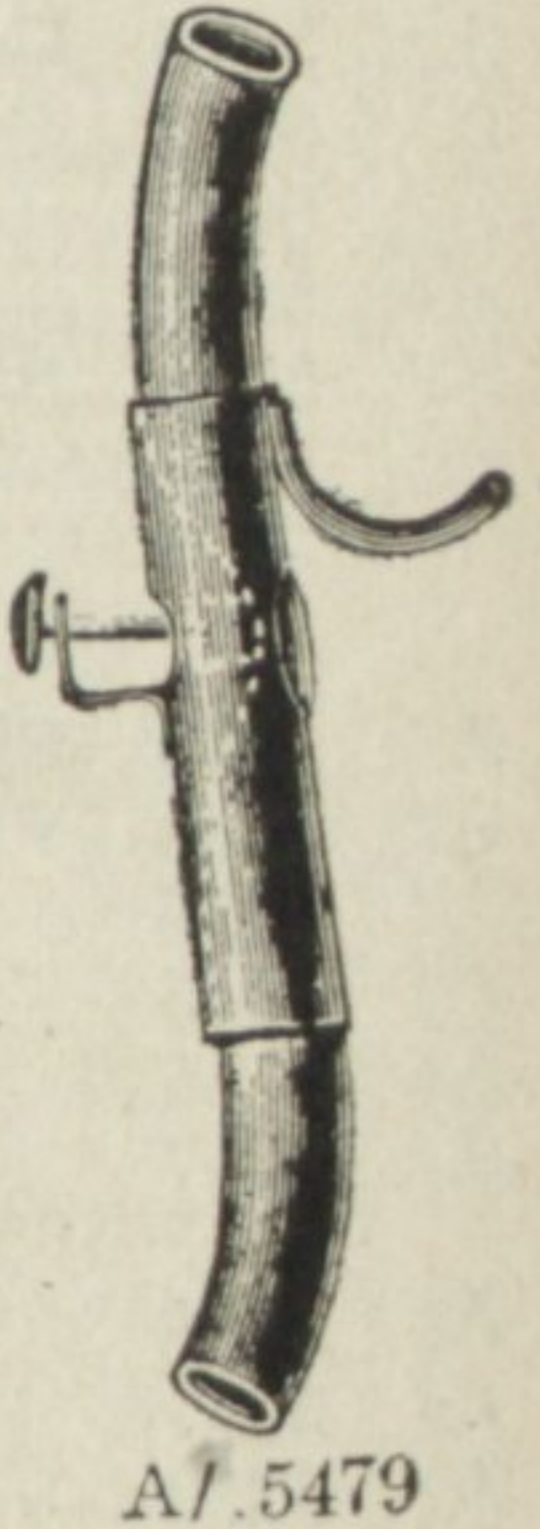


MAX WOCHER & SON, CINCINNATI, O.

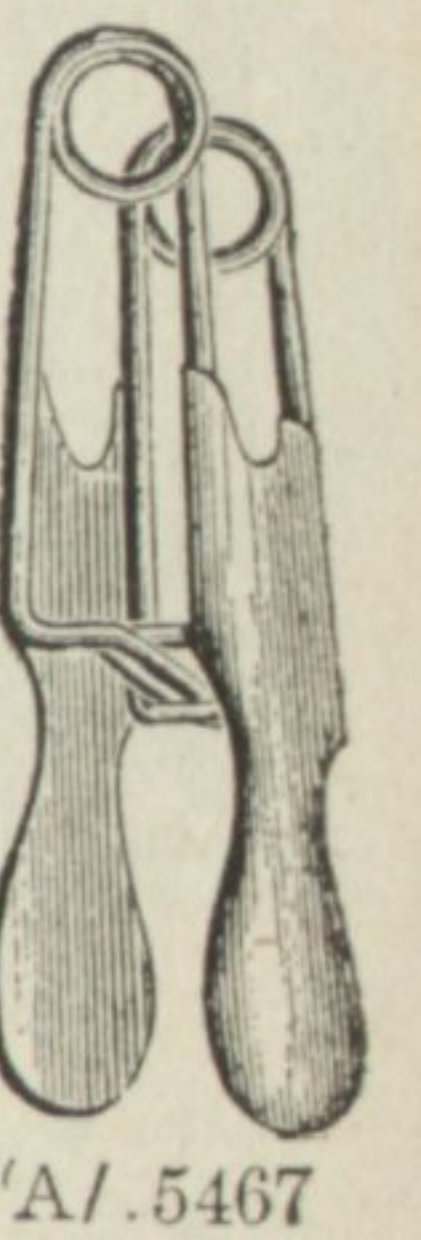

STOPCOCKS.

A/..5317	Hard Rubber, very small, for colpeurynters, etc.	\$ 0 30
A/..5323	" " conical tip and olive end, 1 3/8 in.	0 35
A/..5329	" " " " " " 1 5/8 "	0 40
A/..5335	" " " " " " 2 1/4 "	0 45
A/..5341	" " " " " " 2 3/4 "	0 50
A/..5347	" " Van Buren's, with long, slender tip.	0 50
A/..5353	" " Same, with screw end.	0 50
A/..5355	" " Edebohl's, with ball and socket movement.	0 75
A/..5359	" " Esmarch's, with metal shut-off, one tip.	0 75
A/..5361	" " " " " " two tips.	0 85
*A/..5365	" " with double olive for connections, 1 1/8 in.	0 35
*A/..5371	" " " " " " 2 1/4 "	0 40
*A/..5377	" " " " " " 2 5/8 "	0 45
*A/..5383	" " " " " " 2 7/8 "	0 50
A/..5389	" " " " " " with metal shut-off, 2 3/4 in.	0 50
A/..5395	" " " " " " 3 "	0 60
A/..5401	" " " conical screw thread, and olive end, 3 in.	0 40
A/..5407	" " " " " " 3 1/4 "	0 50
A/..5413	" " " " " " and metal shut-off, 3 1/8 in.	0 50
A/..5419	" " " fine conical tip and olive end.	0 60
A/..5425	" " two ways flow.	1 00
A/..5431	" " " " " " with disk shut-off.	1 25
A/..5437	Metal, with conical tip, 1 1/2 in., nickel-plated.	0 70
A/..5443	" " " " " " 1 1/8 "	0 60
A/..5446	" " metal shield.	1 50
A/..5449	" " cut-off, spiral tip.	0 35
A/..5455	Pinchcock, Flohr's, in 4 sizes.	0 20
A/..5461	Shut-off, automatic.	0 25
A/..5467	" self-closing, in 2 sizes.	0 90
A/..5473	" self-retaining, to control the flow through any size tubing.	1 00
A/..5479	" tubular.	1 10
A/..5485	Tubing Holder.	0 60

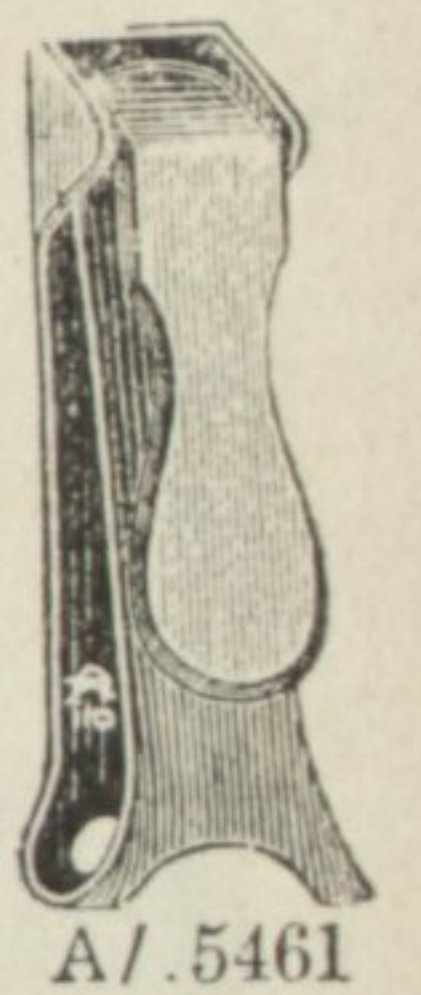

ALL INSTRUMENTS BEARING THE K.-S. CO.'S



TRADE MARK ARE SOLD UNDER GUARANTEE.

STOPCOCKS: