



HEIGHT OF OBSERVER

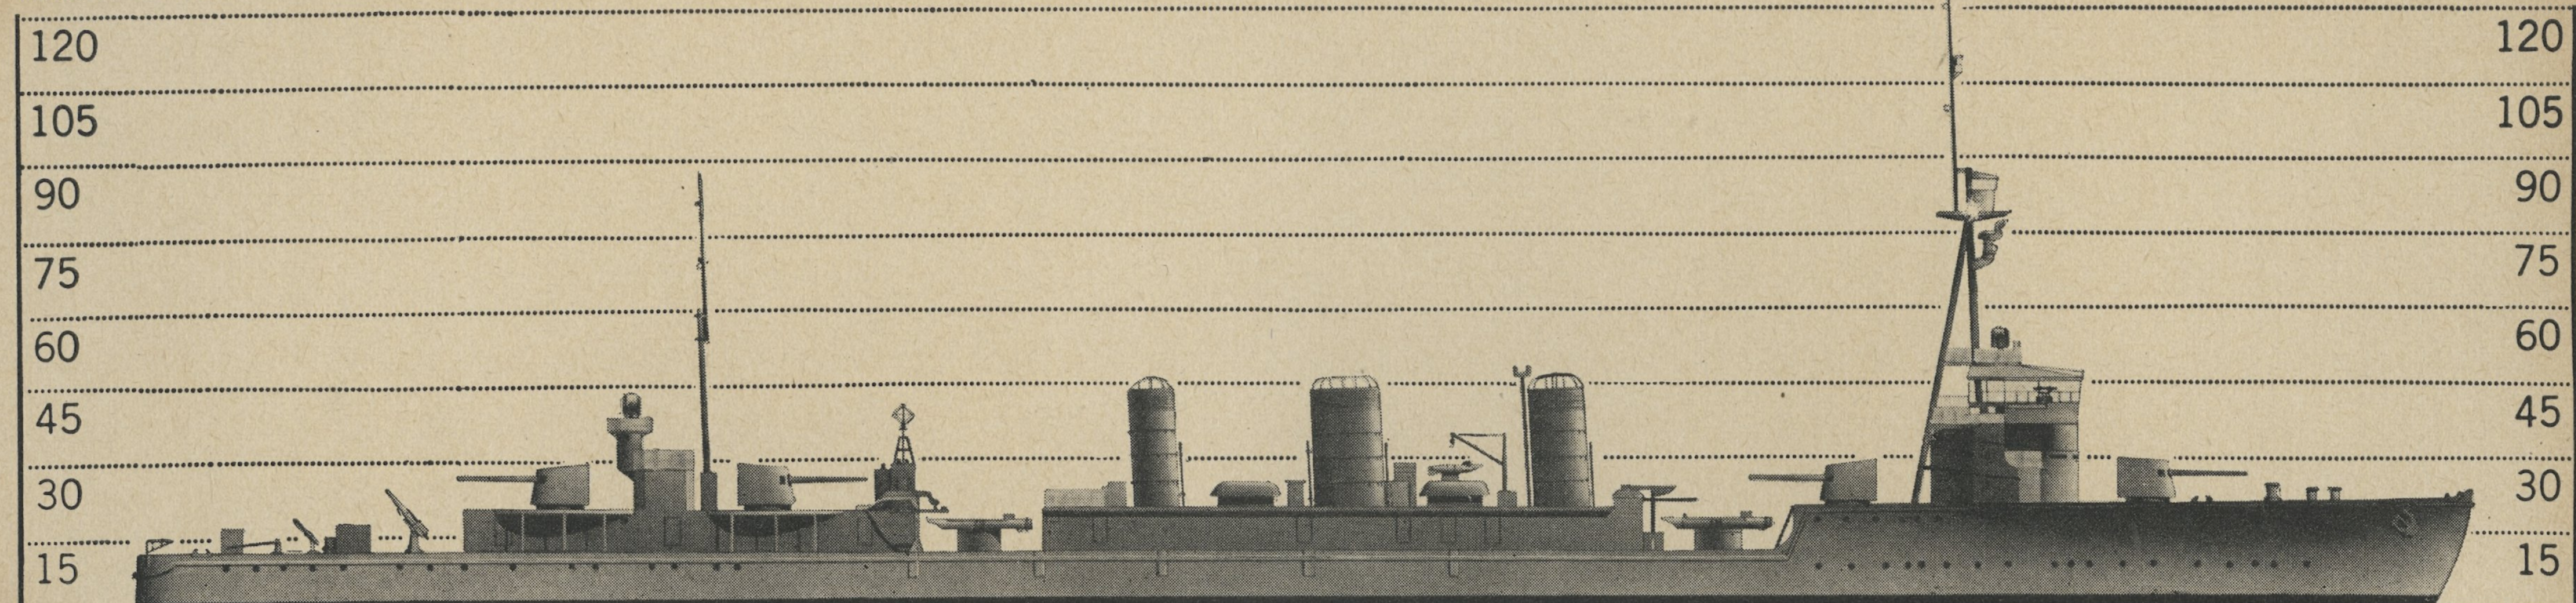


HORIZON BEYOND THE SHIP

SHIP BEYOND THE HORIZON

LENGTH—468' OA
 BEAM —40'9"
 DRAFT —13'3" (NORMAL)

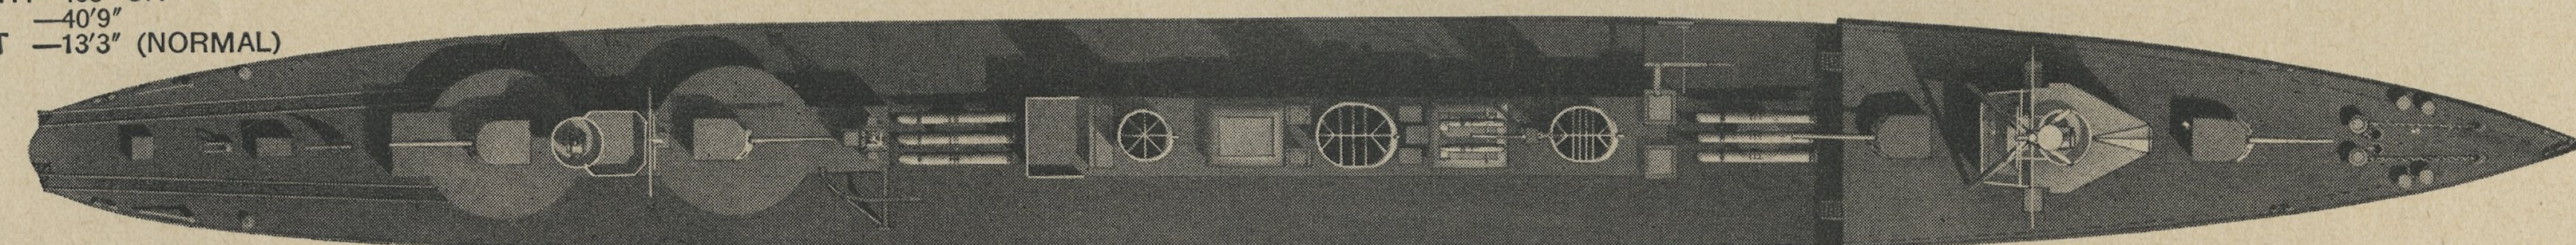

DISPLACEMENT—3,230 TONS (STANDARD)—3,500 TONS (NORMAL)

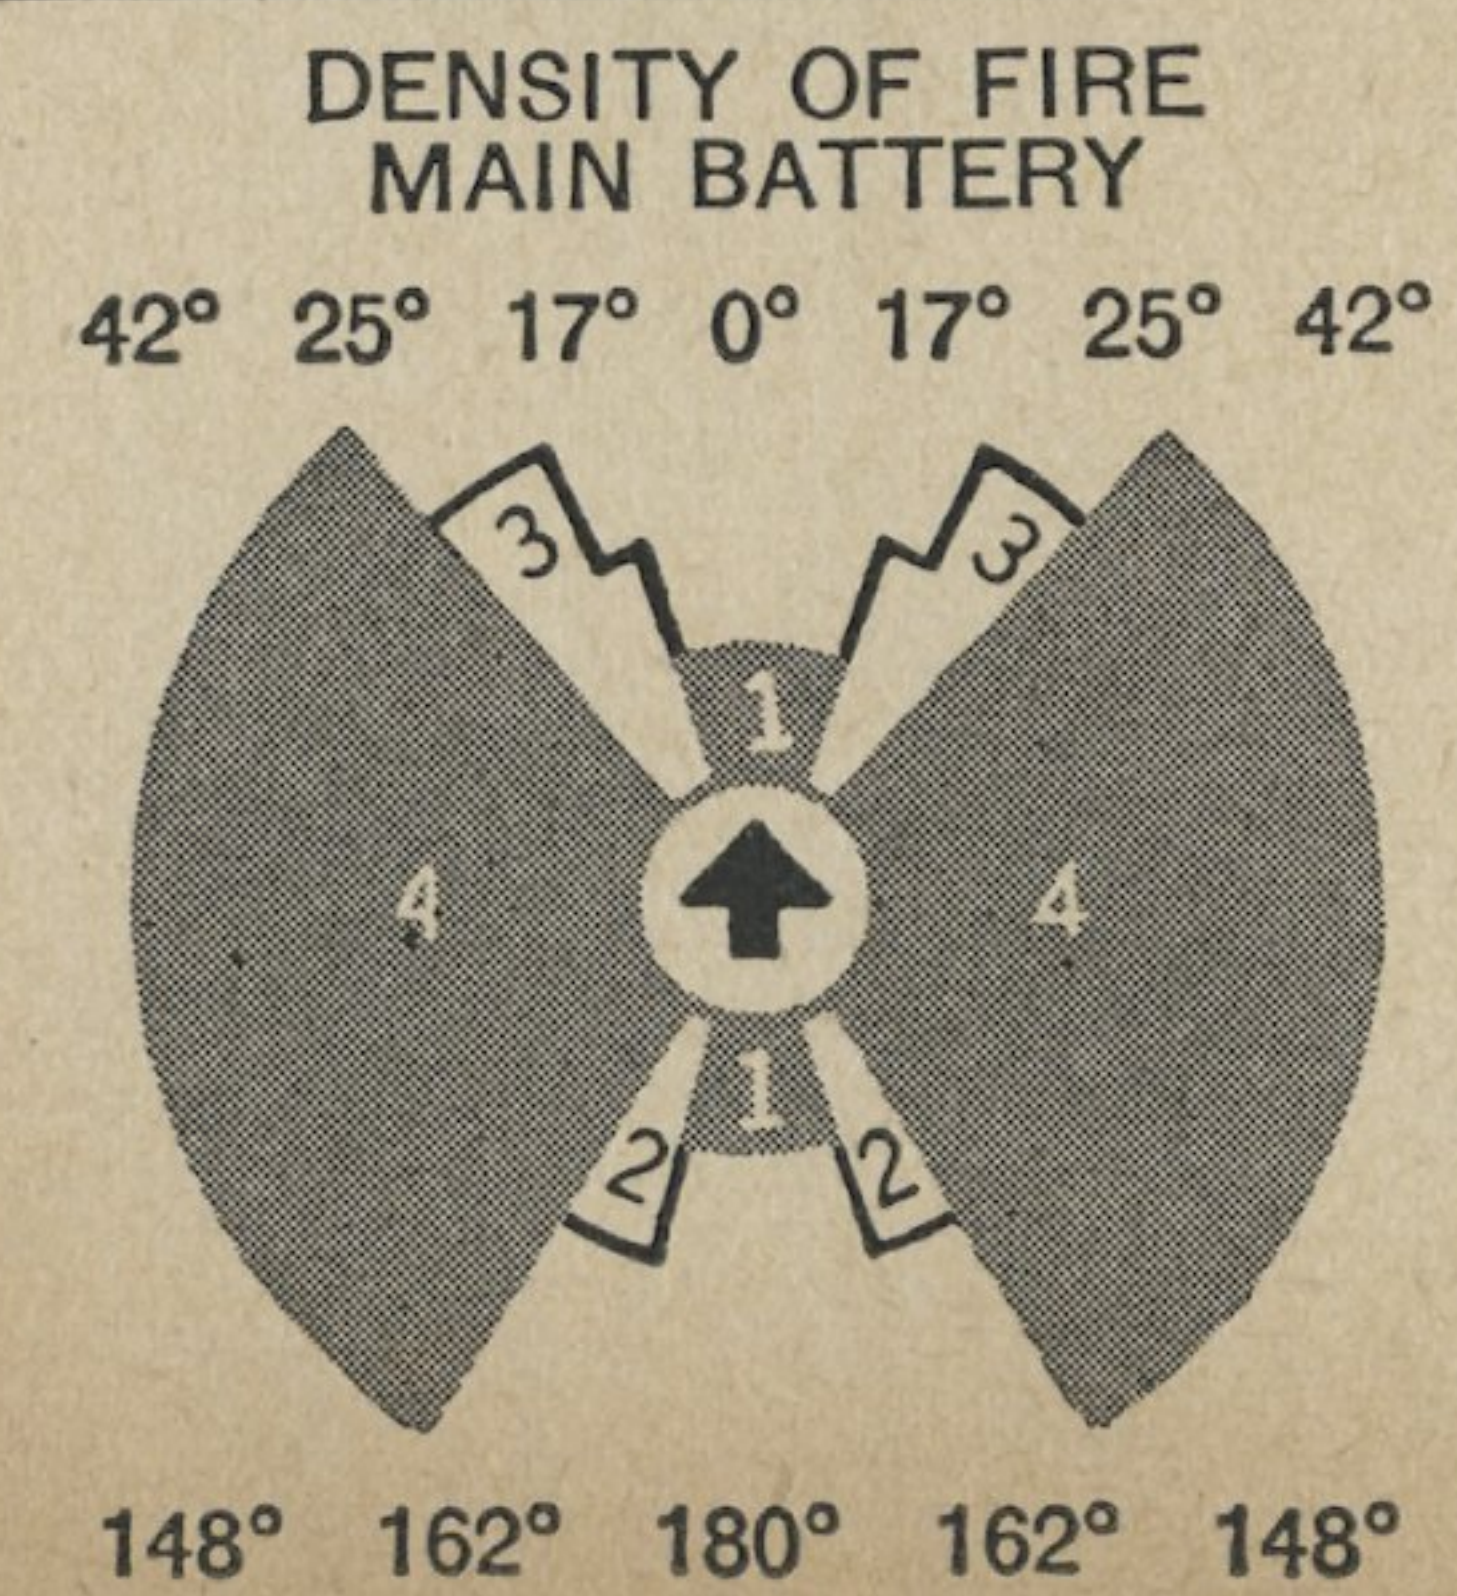

ARMAMENT


MAX. ELEV.

RANGE

4-5.75 (50) 25°
 1-3" (40) 85°
 6-21" TORPEDO TUBES, TRIPLE MOUNTS
 DEPTH CHARGES AND MINES CARRIED

PROTECTION


BELT— 2"
 BARBETTES—
 DECK—
 TURRETS—
 CONNING TOWER—

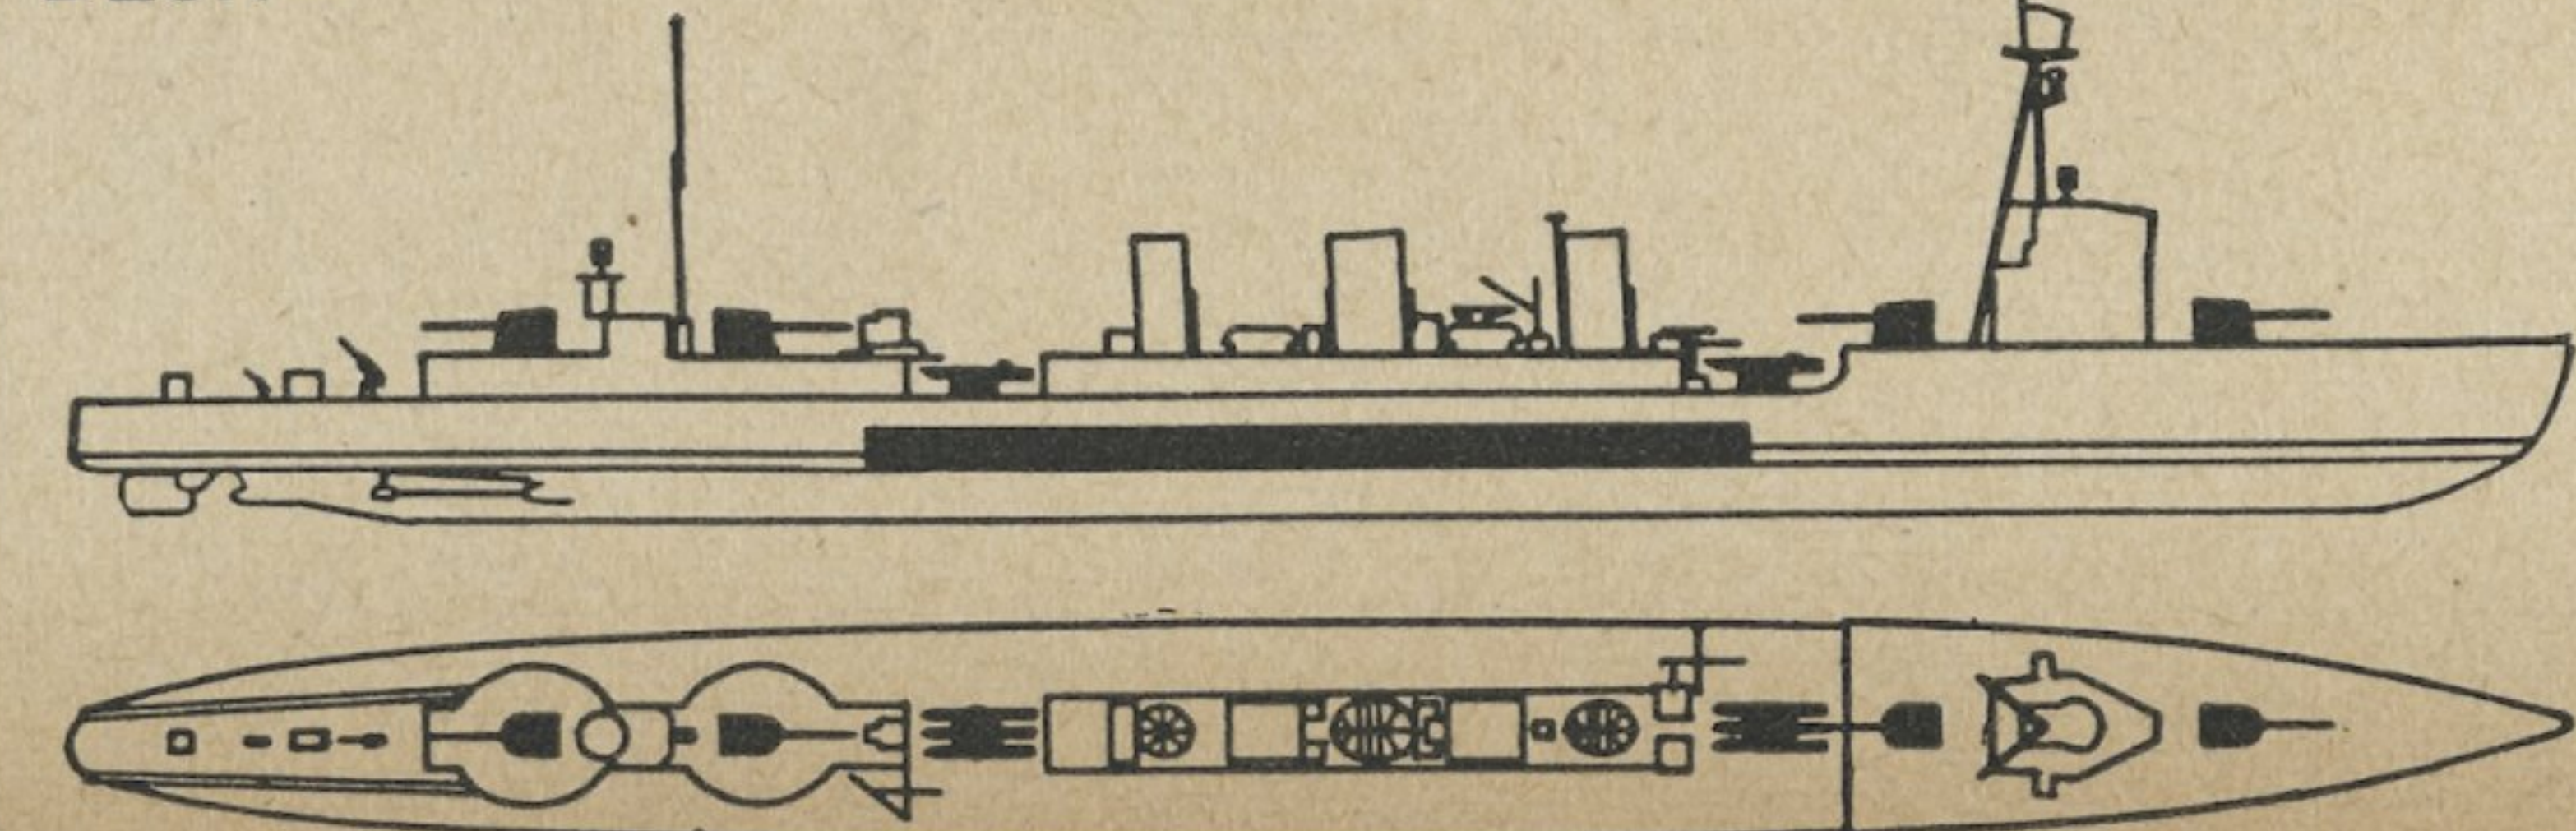


PROPULSION

MACHINERY— CURTIS-PARSONS
 BOILERS— 10 KAMPOON
 FUEL— COAL AND OIL, 900 TONS
 DESIGNED HP— 51,000
 DESIGNED SPEED— 31 KNOTS; 33 KNOTS ON TRIAL
 ENDURANCE— 1,250 @ 31 KNOTS
 6,000 @ 10 KNOTS

TENRYU CLASS

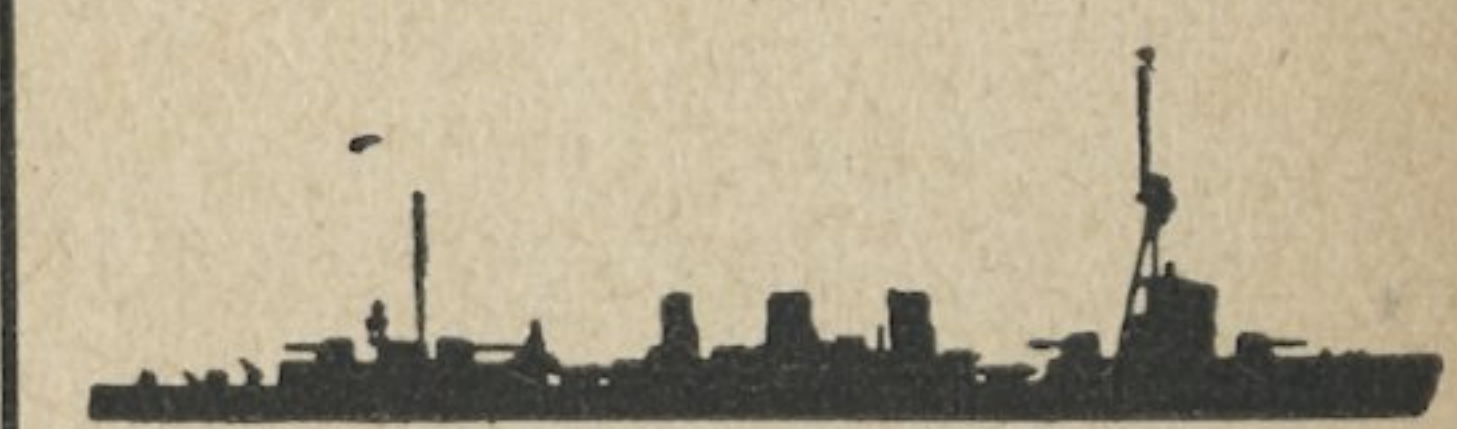

TENRYU—CL 1

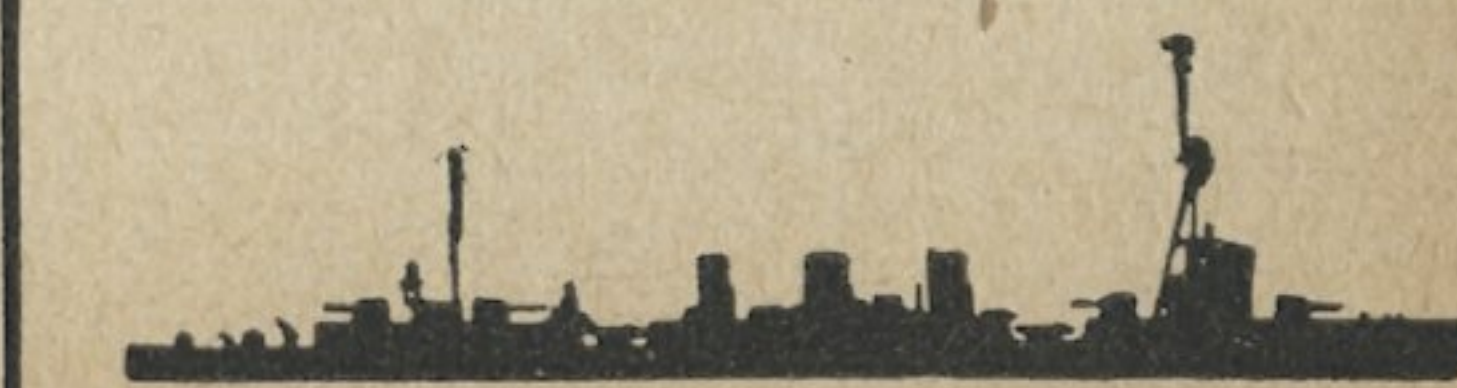

TATSUTA—CL 2

