


[521]

MONTECUCCOLI CLASS—CL 15, 16


DIVISION OF NAVAL INTELLIGENCE—IDENTIFICATION AND CHARACTERISTICS SECTION—FEBRUARY, 1943



HEIGHT OF OBSERVER

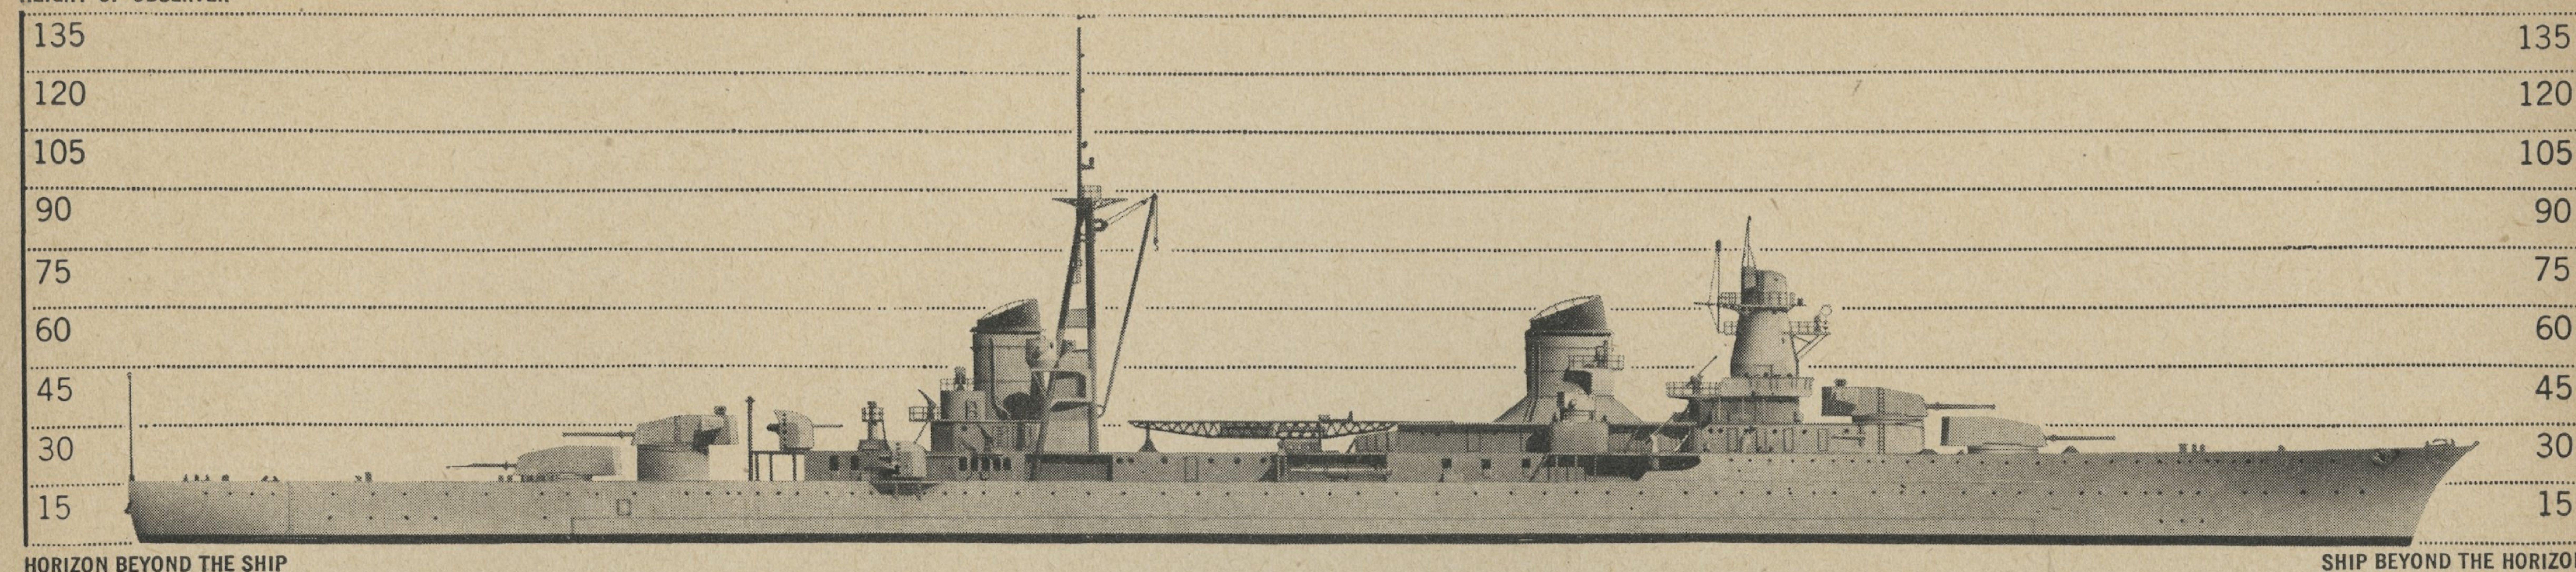


LENGTH—597'9" OA—577'2" WL
BEAM— 54'2"
DRAFT— 18'9" (MAX.)

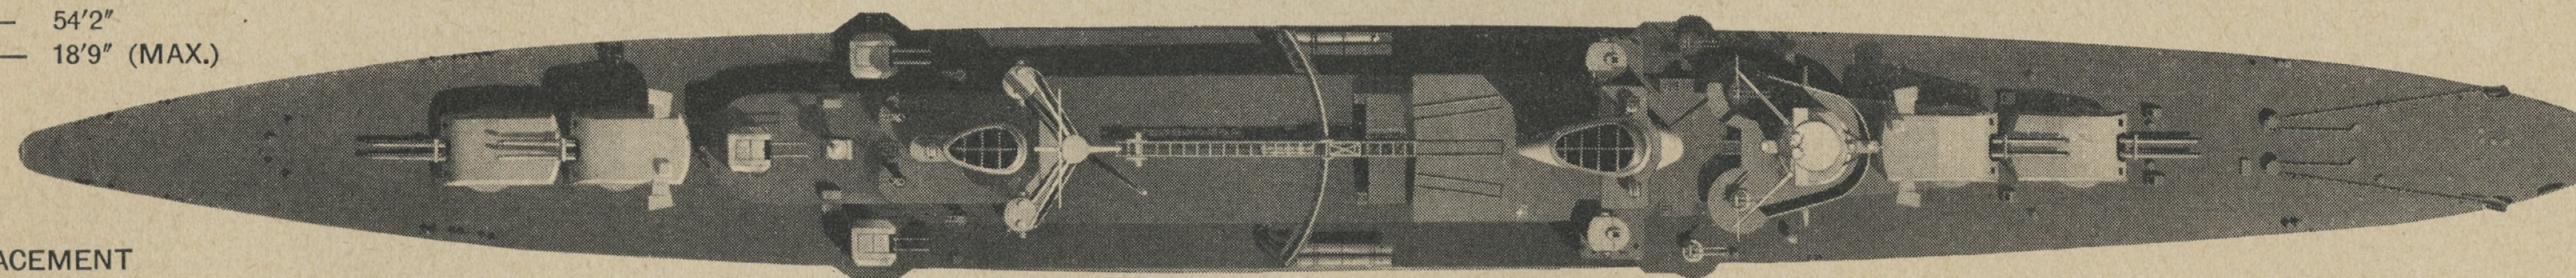

DISPLACEMENT
6,941 TONS (STANDARD)

DENSITY OF FIRE
MAIN BATTERY

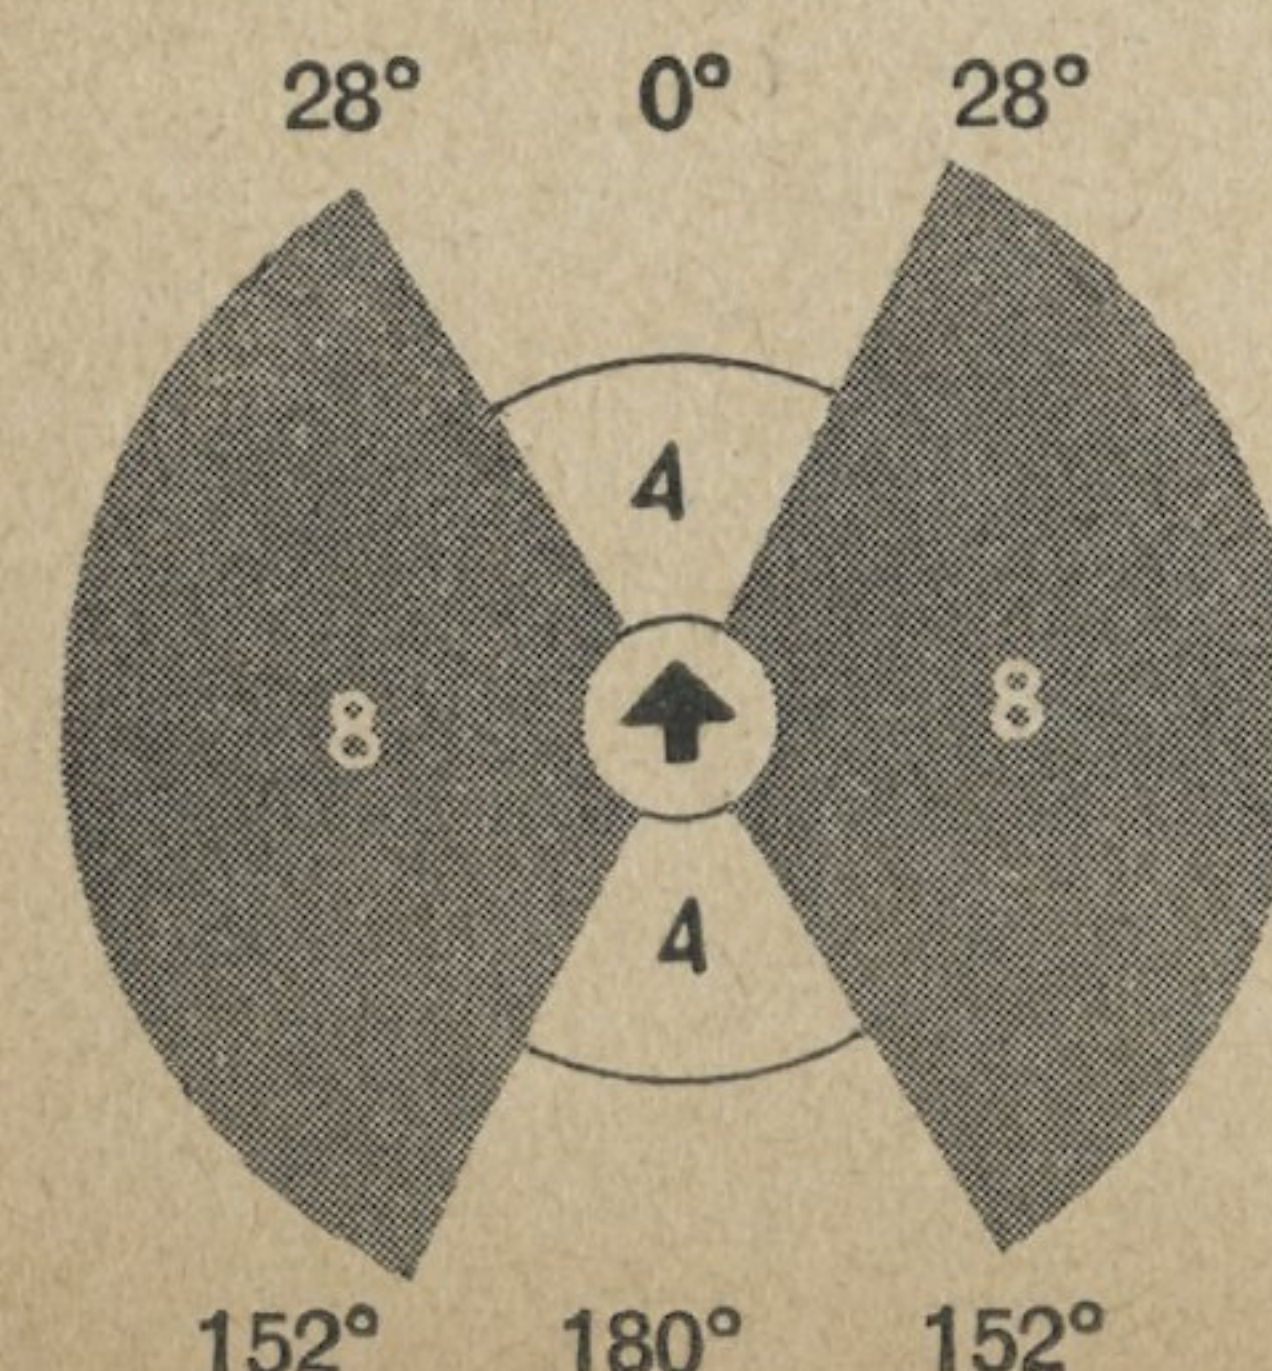

ARMAMENT

8-6" (53) TWIN MOUNTS
6-3"9 (47) A.A.
4-21" TORPEDO TUBES
1 CATAPULT; 3 SCOUT OBSERVATION PLANES
16 DEPTH CHARGES

MAX. ELEV.

45°

RANGE

23,000 YD.
15,000 YD.


PROPULSION

MACHINERY— BELLUZZO & PARSONS
BOILERS— SIX OF 3-DRUM TYPE
FUEL— OIL, 500/1200 TONS
DESIGNED HP— 106,000
ENDURANCE— 2,700 @ 37 KNOTS
15,000 @ 15 KNOTS
18,000 @ 10 KNOTS

DESIGNED SPEED—37 KNOTS

PROTECTION

BELT—2.5" DECK—1.5"
THIN PLATING ON SIDES, TURRETS AND DECKS

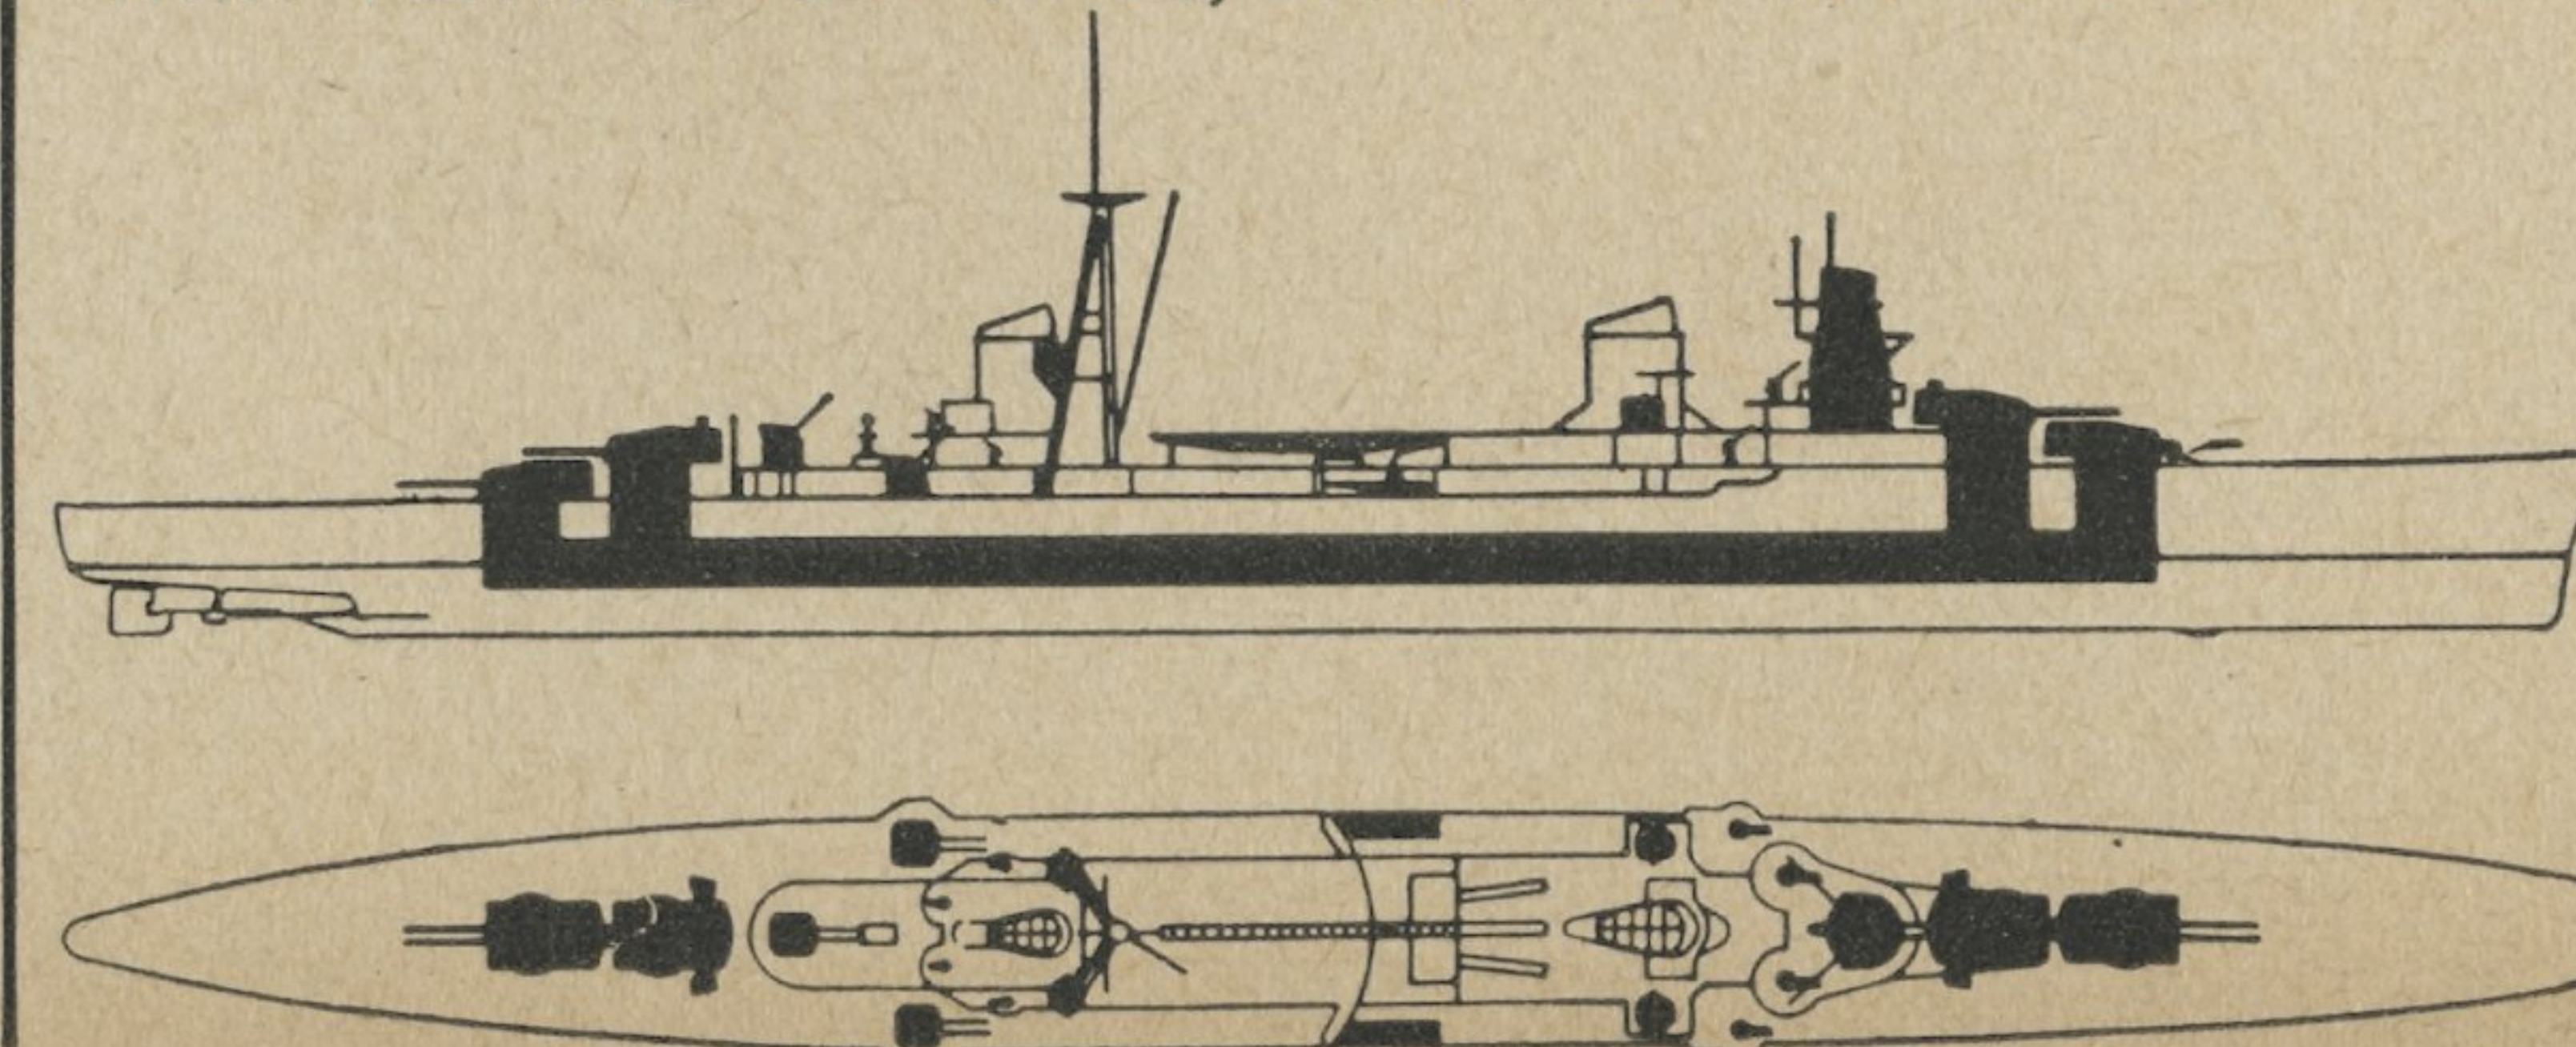

MONTECUCCOLI CLASS:



MONTECUCCOLI—CL 15



ATTENDOLO—CL 16

