
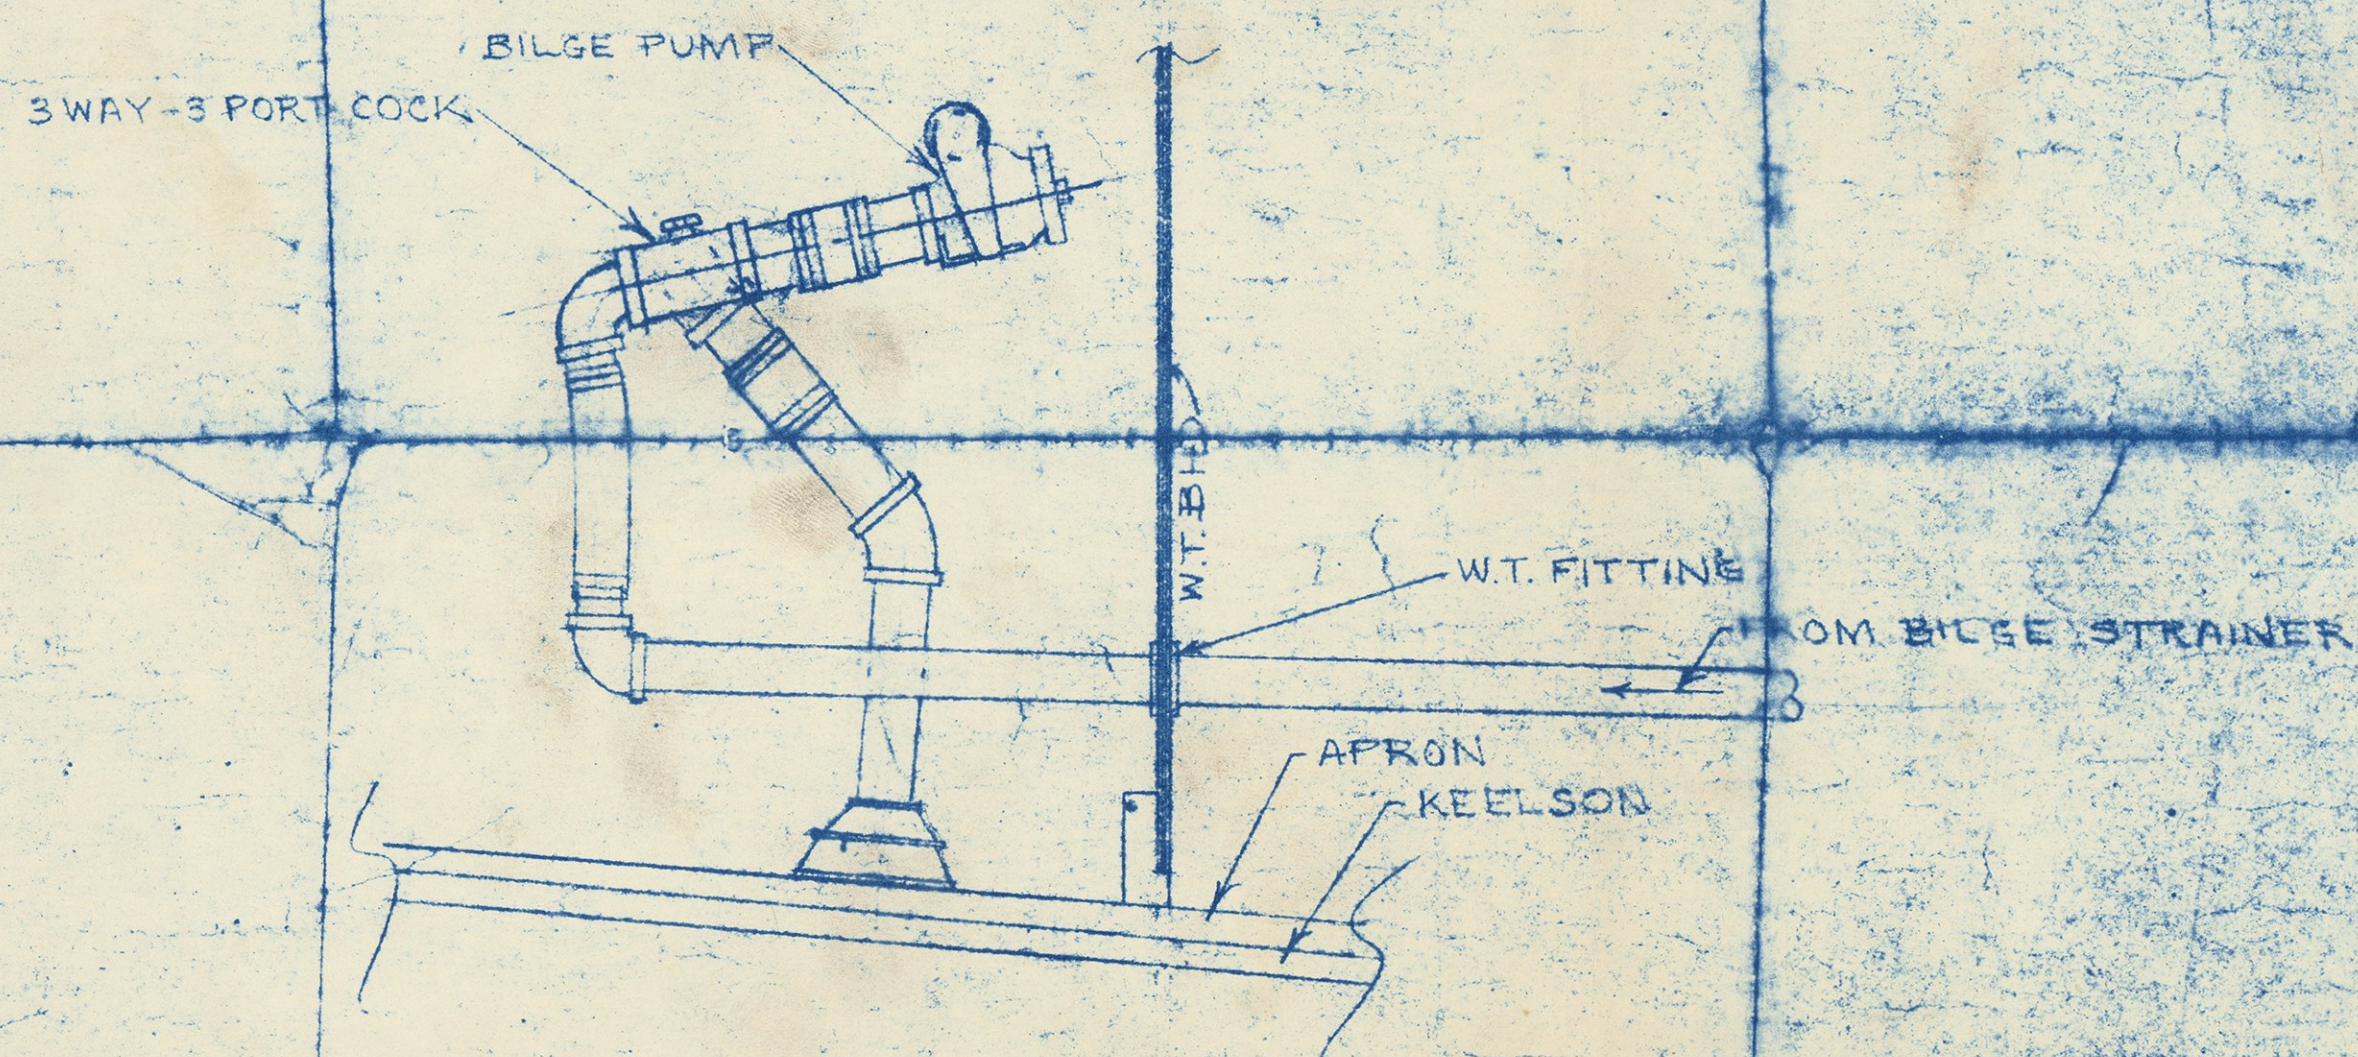


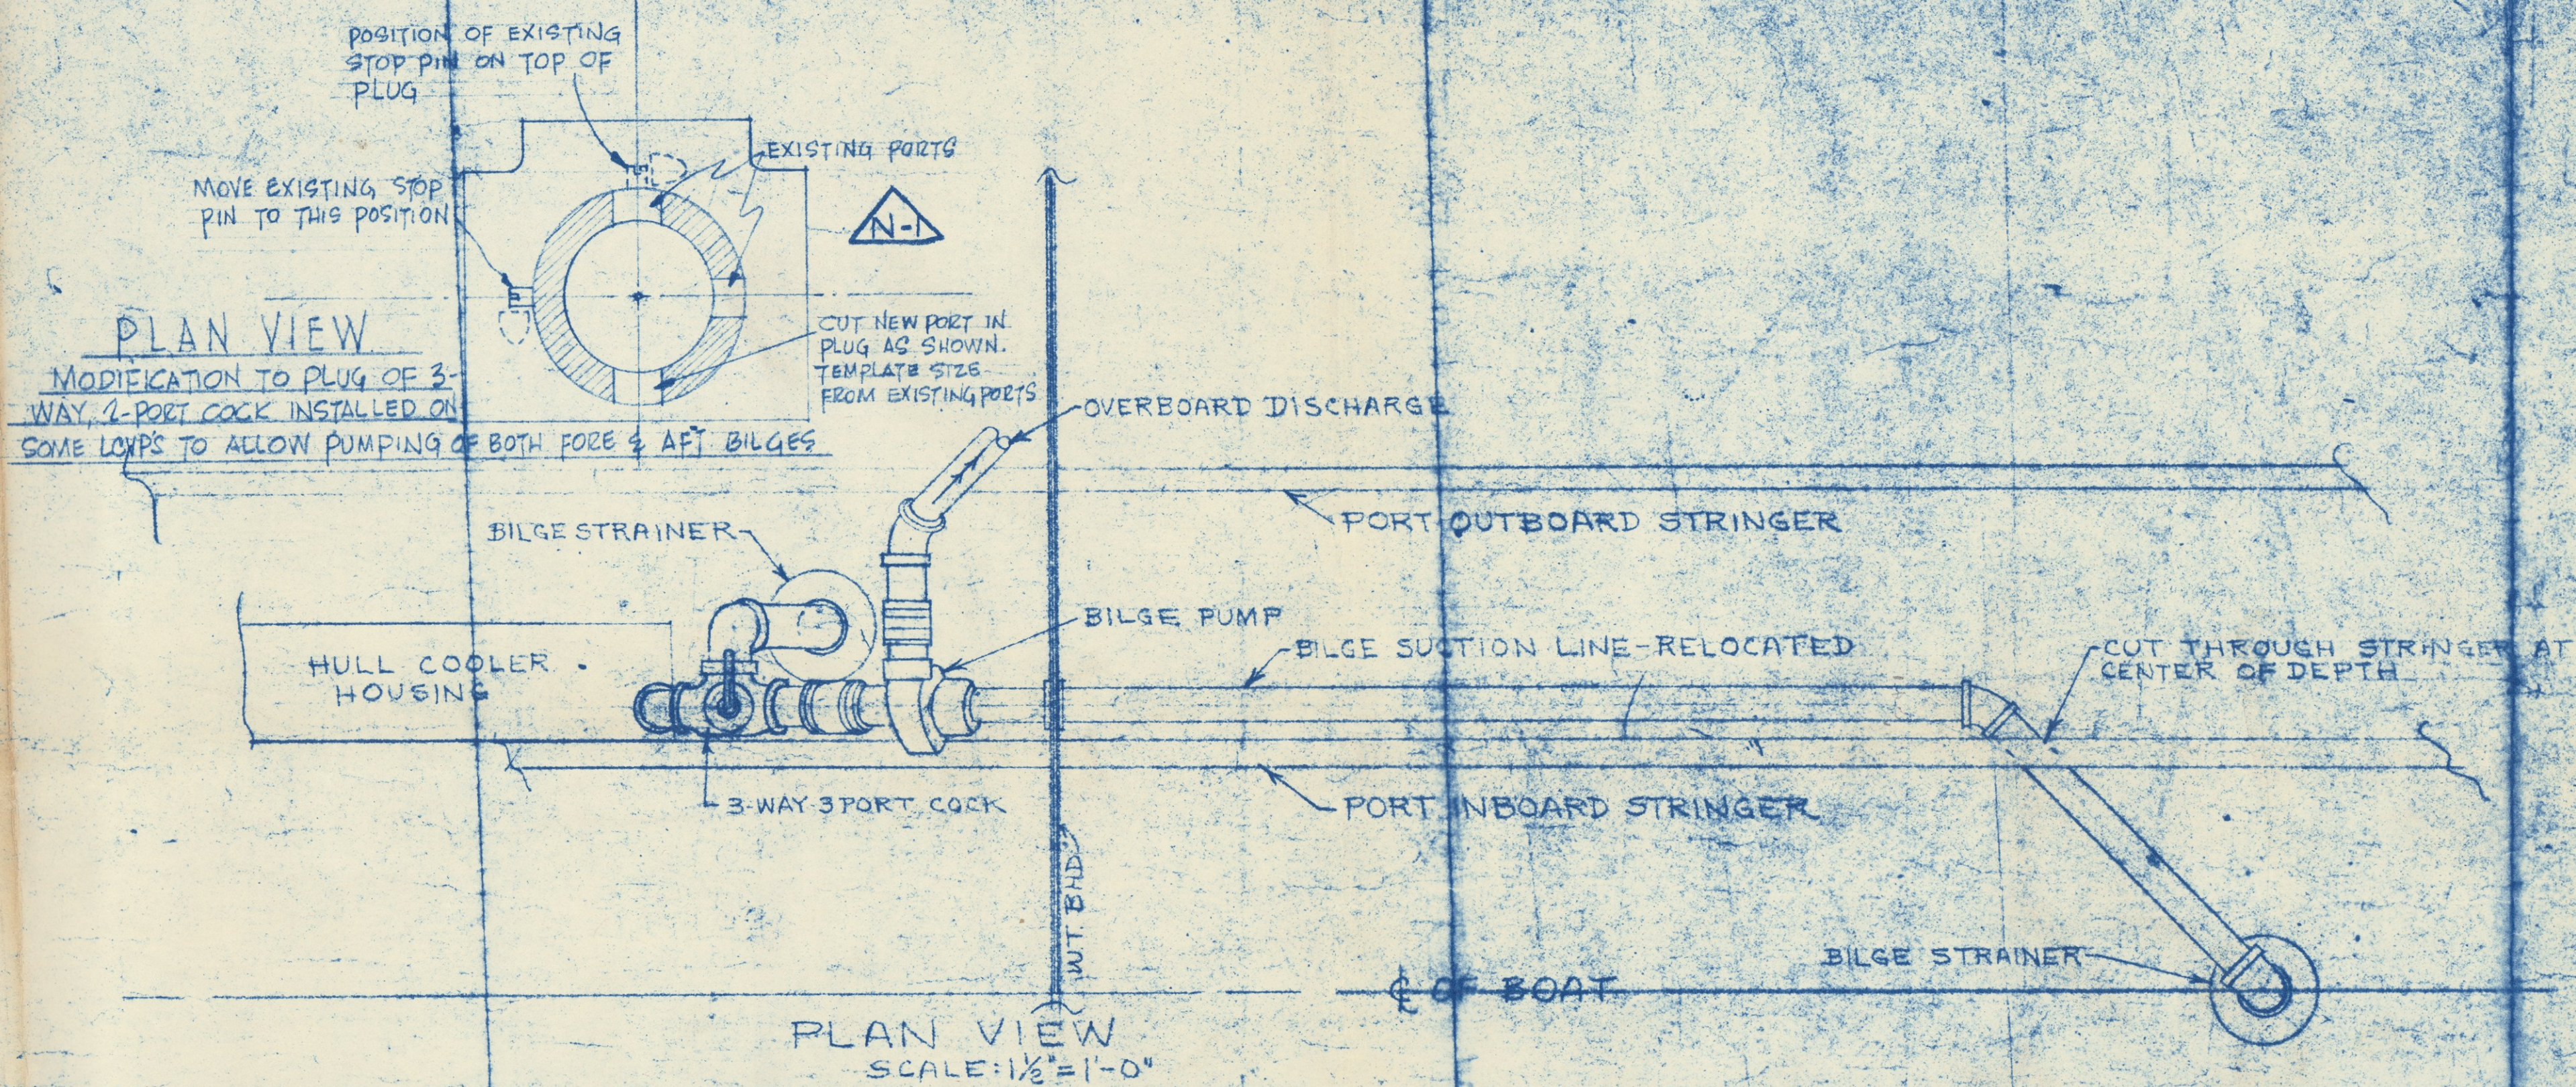

- NOTES
1. ALL PIPING AND FITTINGS PRESENTLY IN BOAT CAN BE REUSED WITH THIS ARRANGEMENT BY SUBSTITUTING ONE 45° ELL FOR ONE 90° ELL.
 2. RUBBER HOSE AND CLAMPS TO BE INSTALLED AS REQUIRED FOR EASE OF DISASSEMBLY.
 3. 3-WAY 2-PORT PLUG COCK INSTALLED ON SOME "LCVP'S" MUST BE MODIFIED AS SHOWN IN DETAIL TO ALLOW PUMPING FORE AND AFT BILGES.

REV.	DESCRIPTION	APPD.	DATE
N-1	ADDED NOTE 3 AND DETAIL OF MODIFICATION TO PLUG COCK IN BILGE SUCTION	W.H.H.	12/30/57

36 FT. LC.V.P.
RELOCATION AND REVISION-
BILGE PIPING SYSTEM

CODE 452 BUREAU OF SHIPS: 17 JAN 1957
W.H.H.

BUSHIPS SKETCH NO 027159
REVISION N-1

REV.	DESCRIPTION	APPD.	DATE
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			
51			
52			
53			
54			
55			
56			
57			
58			
59			
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			

1 1/16
10 1/16
5 1/16
2 1/16

5 1/16
4 1/16
9 1/16

5 1/16
3 19/16
9 8/16

2 3/16
3 1/16

2 3/4
3 1/4
6 5/8
1 1/4

3 1/16
4 1/16
7 1/16

5 1/16
4 1/16
9 1/16
7 1/16

10 1/16
5 1/16

REVISION

REVISION